

[CAN Alarm Series](#)
CANL-97RGB-930-H



More Information

 RoHS Compliant


 CE Compliant

Specifications

Mounting	Panel Mount
Color	Multiple Color
Operating Mode	
Operating Voltage	9-30 Vdc
Typical Operating Current	190 mA at 9 Vdc 55 mA at 30 Vdc
Typical Brightness	1700 cd/m ² , at 9 Vdc at 25°C 1850 cd/m ² , at 30 Vdc at 25°C
Termination	Deutsch DT04-4P (gold terminals)
Termination Strength	Pull test with a maximum of 22 pounds (10 kg) load
Operating Temperature	-20_C to +65_C
Storage Temperature	-40_C to +85_C
Surge Voltage	20% over maximum rated voltage for less than 5 minutes
Reverse Voltage Protection	To the maximum operating voltage
Gasket	Gasket 0.062" thick, 60 Durometer Neoprene ASTM B117 Certified - Withstands exposure to salt spray for 300 hours IP 68 Certified - Withstands water submergence and dust exposure
Construction Materials	Humidity- 95% relative humidity at +40_C continuously for 100 hours. Vibration- Withstands vibration between 0 and 55 Hz. on all axes.
Life Expectancy	10 years under normal operating conditions.
Warranty	For a period of two years from the date of manufacture under normal operating conditions.
Notes	This product is not intended as a life safety device.
Terms and Conditions of Sale	Link here

BACK



SIDE

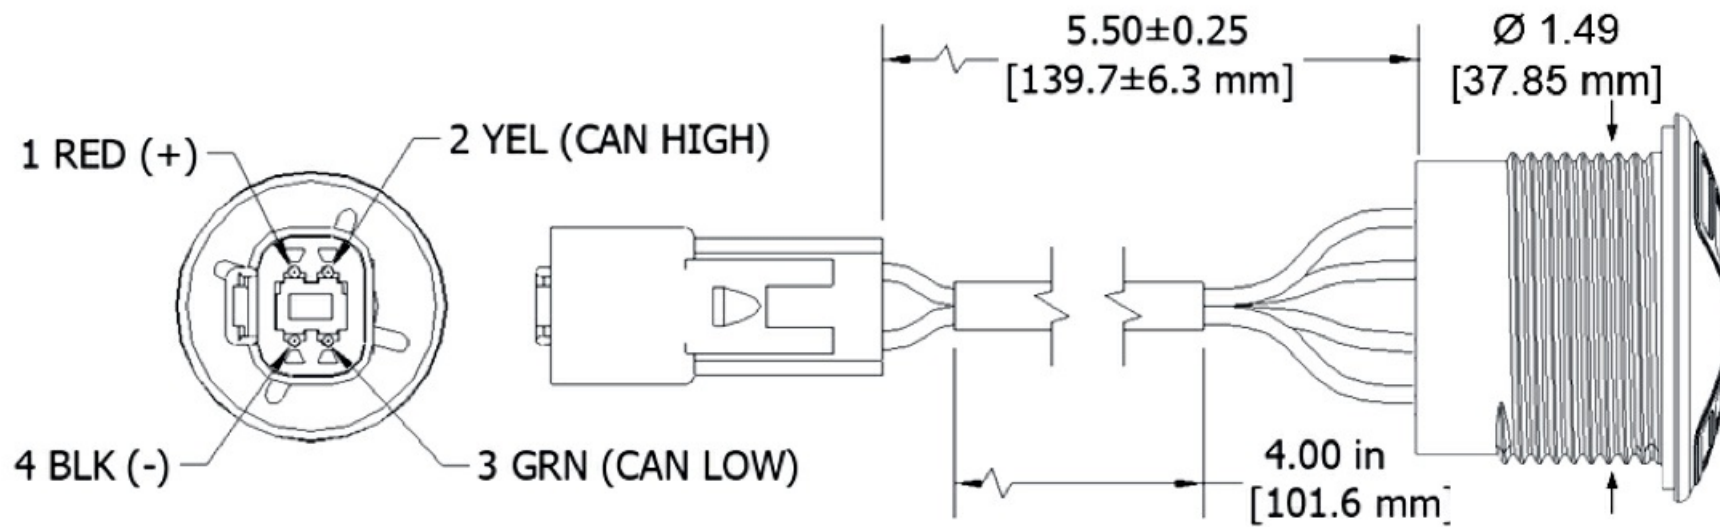

TOLERANCES ARE $\pm 0.03 \pm 0.76$ mm UNLESS OTHERWISE NOTED

BACK

SIDE

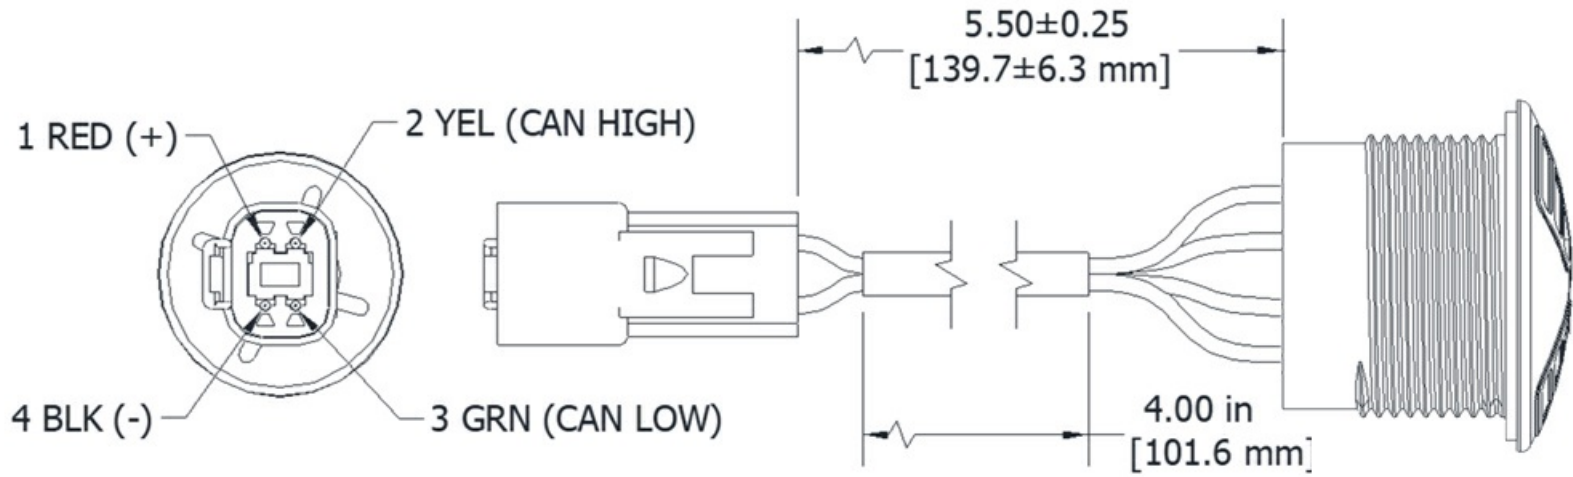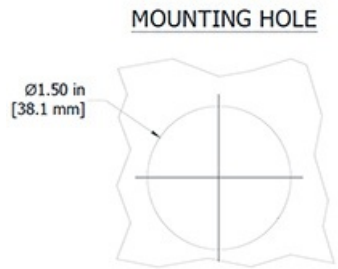

TOLERANCES ARE $\pm 0.03 \pm 0.76$ mm UNLESS OTHERWISE NOTED